

Mutation Testing

Moonzoo Kim
School of Computing
KAIST

*The original slides are taken from Chap. 9 of Intro. to SW Testing
2nd ed by Ammann and Offutt*



Mutation Testing

- **Operators** modify a program under test to create **mutant programs**
 - Mutant programs must compile correctly
 - Mutants are not tests, but used to find good tests
- Once mutants are defined, **tests** must be found to cause mutants to fail when executed
 - This is called “**killing mutants**”

Killing Mutants

Given a mutant $m \in M$ for a ground string program P and a test t , t is said to **kill** m if and only if the output of t on P is different from the output of t on m .

- If mutation operators are designed well, the resulting tests will be **very powerful**
- Different operators must be defined for different programming languages and goals
- Testers can keep adding tests until all mutants have been killed
 - *Dead mutant* : A test case has killed it
 - *Trivial mutant* : Almost every test can kill it
 - *Equivalent mutant* : No test can kill it (equivalent to original program)
 - *Stubborn mutant*: Almost no test can kill it (a.k.a hard-to-kill mutants)

Program-based Grammars

Original Method

```
int Min (int A, int B)
{
    int minVal;
    minVal = A;
    if (B < A)
    {
        minVal = B;
    }
    return (minVal);
} // end Min
```

6 mutants

Each represents a separate program

With Embedded Mutants

```
int Min (int A, int B)
{
    int minVal;
    minVal = A;
    Δ 1 minVal = B;
    if (B < A)
    Δ 2 if (B > A)
    Δ 3 if (B < minVal)
    {
        minVal = B;
    Δ 4 Bomb ();
    Δ 5 minVal = A;
    Δ 6 minVal = failOnZero (B);
    }
    return (minVal);
} // end Min
```

Replace one variable with another

Changes operator

Immediate runtime failure ... if reached

Immediate runtime failure if B==0 else does nothing

Syntax-Based Coverage Criteria

Mutation Coverage (MC) : For each $m \in M$, TR contains exactly one requirement, to kill m .

- The RIP model
 - **Reachability** : The test causes the faulty statement to be reached (in mutation – the mutated statement)
 - **Infection** : The test causes the faulty statement to result in an incorrect state
 - **Propagation** : The incorrect state **propagates** to incorrect **output**
- The RIP model leads **to two variants** of mutation coverage ...

Strong v.s. Weak Mutants

1) Strongly Killing Mutants:

Given a mutant $m \in M$ for a program P and a test t , t is said to **strongly kill** m if and only if the **output** of t on P is different from the output of t on m

2) Weakly Killing Mutants:

Given a mutant $m \in M$ that modifies a location l in a program P , and a test t , t is said to **weakly kill** m if and only if the **state** of the execution of P on t is different from the state of the execution of m **immediately** on t after l

- Weakly killing satisfies **reachability** and **infection**, but not **propagation**

Equivalent Mutation Example

- Mutant 3 in the Min() example is equivalent:

```
minVal = A;  
if (B < A)  
Δ 3 if (B < minVal)
```

- The infection condition is “(B < A) != (B < minVal)”
- However, the previous statement was “minVal = A”
 - Substituting, we get: “(B < A) != (B < A)”
 - This is a logical contradiction !
- Thus no input can kill this mutant

Strong Versus Weak Mutation

```
1  boolean isEven (int X)
2  {
3      if (X < 0)
4          X = 0 - X;
Δ 4      X = 0;
5      if (double) (X/2) == ((double) X) / 2.0
6          return (true);
7      else
8          return (false);
9  }
```

Reachability : $X < 0$

Infection : $X \neq 0$

**$(X = -6)$ will kill mutant 4
under weak mutation**

Propagation :


$((\text{double}) ((0-X)/2) == ((\text{double}) 0-X) / 2.0)$

$!= ((\text{double}) (0/2) == ((\text{double}) 0) / 2.0)$

That is, X is not even ...

**Thus $(X = -6)$ does not kill the mutant under
strong mutation**

Testing Programs with Mutation

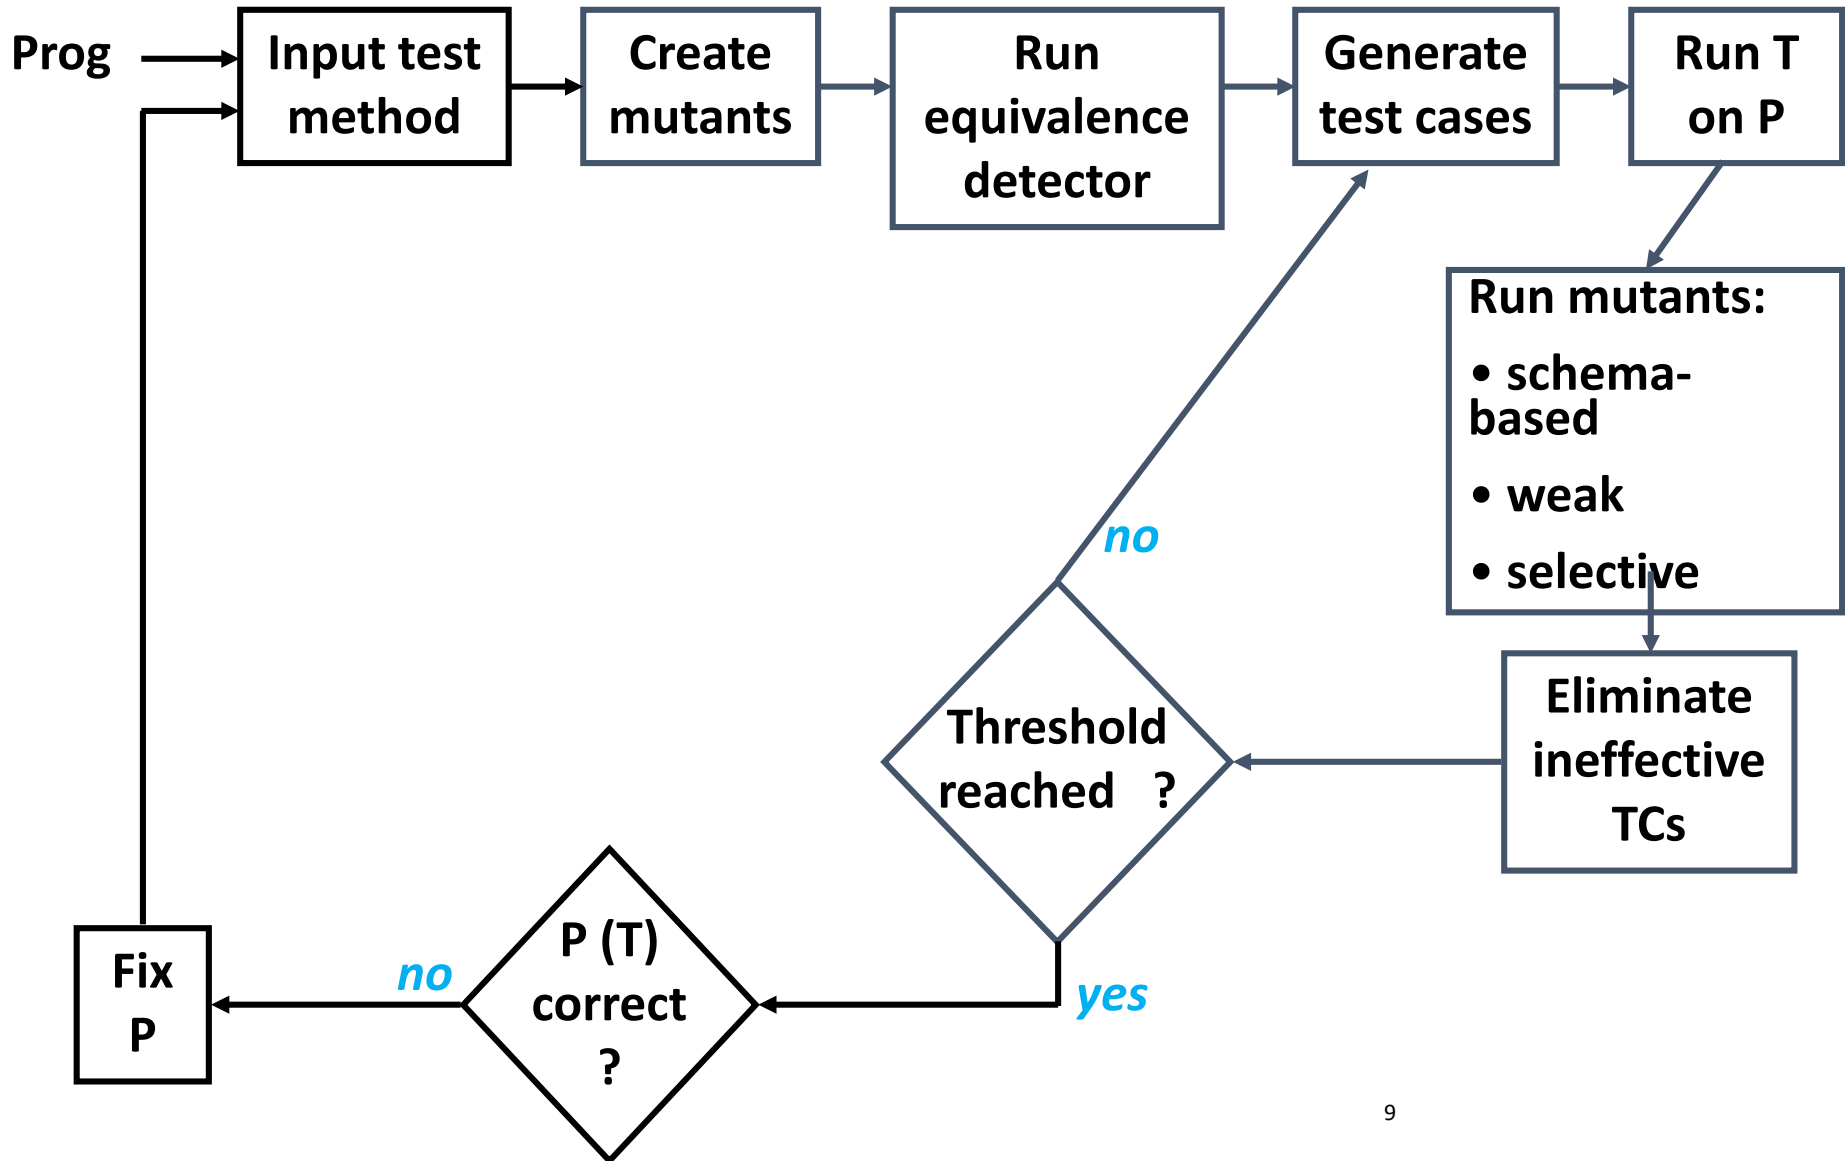

Why Mutation Testing Works

Fundamental Premise of Mutation Testing

If the software contains a fault, there will usually be a set of mutants that can only be killed by a test case that also detects that fault

- Also known as “**Coupling Effect**”
 - “a test data set that distinguishes all programs with simple faults is so sensitive that it will also distinguish programs with more complex faults”
 - R. A. DeMillo, R. J. Lipton, and F. G. Sayward. Hints on test data selection: Help for the practicing programmer. *Computer*, 11(4), April 1978.
- The mutants guide the tester to an effective set of tests
- A very challenging problem :
 - Find a fault and a set of mutation-adequate tests that do not find the fault
- Of course, this depends on the mutation operators ...

Designing Mutation Operators

- At the **method level**, mutation operators for different programming languages are similar
- Mutation operators do one of two things :
 - Mimic typical programmer **mistakes** (incorrect variable name)
 - Encourage common test **heuristics** (cause expressions to be 0)
- Researchers design lots of operators, then experimentally *select* the most useful

Effective Mutation Operators

If tests that are created specifically to kill mutants created by a collection of mutation operators $O = \{o1, o2, \dots\}$ also kill mutants created by all remaining mutation operators with very high probability, then O defines an *effective* set of mutation operators

Mutation Operators

1. ABS — Absolute Value Insertion:

Each arithmetic expression (and subexpression) is modified by the functions *abs()*, *negAbs()*, and *failOnZero()*.

Examples:

```
a = m * (o + p);
```

```
Δ1 a = abs (m * (o + p));
```

```
Δ2 a = m * abs ((o + p));
```

```
Δ3 a = failOnZero (m * (o + p));
```

2. AOR — Arithmetic Operator Replacement:

Each occurrence of one of the arithmetic operators $+$, $-$, $*$, $/$, and $\%$ is replaced by each of the other operators. In addition, each is replaced by the special mutation operators *leftOp*, and *rightOp*.

Examples:

```
a = m * (o + p);
```

```
Δ1 a = m + (o + p);
```

```
Δ2 a = m * (o * p);
```

```
Δ3 a = m leftOp (o + p);
```

3. ROR — Relational Operator Replacement:

Each occurrence of one of the relational operators (<, ≤, >, ≥, =, ≠) is replaced by each of the other operators and by *falseOp* and *trueOp*.

Examples:

```
    if (X <= Y)
Δ1  if (X > Y)
Δ2  if (X < Y)
Δ3  if (X falseOp Y) // always returns false
```

4. COR — Conditional Operator Replacement:

Each occurrence of one of the logical operators (and - &&, or - ||, and with no conditional evaluation - &, or with no conditional evaluation - |, not equivalent - ^) is replaced by each of the other operators; in addition, each is replaced by *falseOp*, *trueOp*, *leftOp*, and *rightOp*.

Examples:

```
    if (X <= Y && a > 0)
Δ1  if (X <= Y || a > 0)
Δ2  if (X <= Y leftOp a > 0) // returns result of left clause
```

5. SOR — Shift Operator Replacement:

Each occurrence of one of the shift operators <<, >>, and >>> is replaced by each of the other operators. In addition, each is replaced by the special mutation operator *leftOp*.

Examples:

```
byte b = (byte) 16;
```

```
b = b >> 2;
```

```
Δ1 b = b << 2;
```

```
Δ2 b = b leftOp 2; // result is b
```

6. LOR — Logical Operator Replacement:

Each occurrence of one of the logical operators (bitwise and - &, bitwise or - |, exclusive or - ^) is replaced by each of the other operators; in addition, each is replaced by *leftOp* and *rightOp*.

Examples:

```
int a = 60; int b = 13;
```

```
int c = a & b;
```

```
Δ1 int c = a | b;
```

```
Δ2 int c = a rightOp b; // result is b
```

7. ASR — Assignment Operator Replacement:

Each occurrence of one of the assignment operators (`+=`, `-=`, `*=`, `/=`, `%=`, `&=`, `|=`, `^=`, `<<=`, `>>=`, `>>>=`) is replaced by each of the other operators.

Examples:

```
a = m * (o + p);
```

```
Δ1 a += m * (o + p);
```

```
Δ2 a *= m * (o + p);
```

8. UOI — Unary Operator Insertion:

Each unary operator (arithmetic `+`, arithmetic `-`, conditional `!`, logical `~`) is inserted in front of each expression of the correct type.

Examples:

```
a = m * (o + p);
```

```
Δ1 a = m * -(o + p);
```

```
Δ2 a = -(m * (o + p));
```

9. UOD — Unary Operator Deletion:

Each unary operator (arithmetic +, arithmetic -, conditional !, logical~) is deleted.

Examples:

```
if !(X <= Y && !Z)
```

```
Δ1 if (X > Y && !Z)
```

```
Δ2 if !(X < Y && Z)
```

10. SVR — Scalar Variable Replacement:

Each variable reference is replaced by every other variable of the appropriate type that is declared in the current scope.

Examples:

```
a = m * (o + p);
```

```
Δ1 a = o * (o + p);
```

```
Δ2 a = m * (m + p);
```

```
Δ3 a = m * (o + o);
```

```
Δ4 p = m * (o + p);
```


11. BSR — Bomb Statement Replacement:

Each statement is replaced by a special Bomb() function.

Example:

```
a = m * (o + p);
```

```
Δ1 Bomb() // Raises exception when reached
```

Summary : Subsumption of Other Criteria

- Mutation is widely considered the **strongest** test criterion
 - And most **expensive** !
 - By far the most test requirements (each mutant)
 - Not always the most tests
- Mutation **subsumes** other criteria by including specific mutation operators
- Subsumption can only be defined for **weak mutation** – other criteria impose local requirements, like weak mutation
 - Node coverage
 - Edge coverage
 - Clause coverage
 - All-defs data flow coverage
- Reference:
 - An Analysis and Survey of the Development of Mutation Testing by Y.Jia et al.
 - IEEE Transactions on Software Engineering Volume: 37 Issue: 5
 - Design Of Mutant Operators For The C Programming Language by H.Agrawal et al.
 - Technical report

Bug Observability/Detection Model: Reachability, Infection, Propagation, and Revelation (RIPR)

- Terminology
 - **Fault**: static defect in a program text (a.k.a a bug)
 - **Error**: dynamic (intermediate) behavior that deviates from its (internal) intended goal
 - A fault causes an error (i.e. error is a symptom of fault)
 - **Failure**: dynamic behavior which violates a ultimate goal of a target program
 - Not every error leads to failure due to error masking or fault tolerance
- Graph coverage
 - Test requirement satisfaction == **Reachability**
 - the fault in the code has to be reached
- Logic coverage
 - Test requirement satisfaction == **Infection**
 - the fault has to put the program into an error state.
 - Note that a program is in an error state does not mean that it will always produce the failure
- Mutation coverage
 - Test requirement satisfaction == **Propagation**
 - the program needs to exhibit incorrect outputs
- Furthermore, test oracle plays critical role to reveal failure of a target program (**Revelation**)